


Series 5

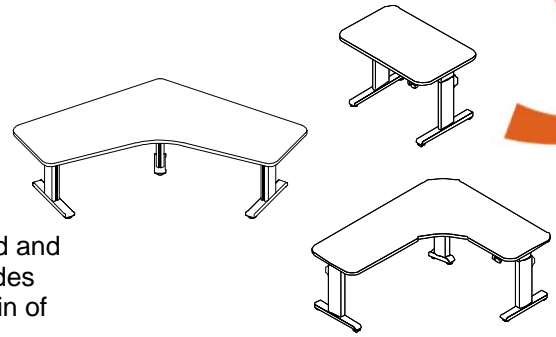

Customer Needs:

Height-adjustable worksurfaces that are usable in both seated and standing postures, by users ranging from 5' 0" to 6' 4". Provides adjustment throughout the day to address the stress and strain of intense computing activity.

Product Features

Performance & Specifications:

- 25-1/2" to 52" electric height adjustability range (assumes .5" glide adjustment)
- Travel speed is 1.7" per second
- 220 lbs. distributed load bearing capacity per table (including worksurface)
- Maximum allowable load is to be evenly distributed and must not be exceeded. (See Weight Capacity Guideline for more information)
- Lifting columns controlled by "master" and "slave" motors via a single switch
- Electrical – 120V, 60Hz, Single phase, 10% duty cycle. May draw 4 amps maximum under full load, idle current is typically 20mA.
- All assemblies meet or exceed ANSI/BIFMA standards
- More than just a worksurface; add the right worktools and it becomes a fully adjustable workstation

Adjustment:

- 3-stage synchronized lifting columns with integral shrouding
- Push button height adjustability
- Infinite height adjustment within the range
- 2" diameter glides have .5" of height adjustment for surface leveling on uneven floors

Worksurface Construction:

- Core is 45 pound particle board
- Surface is High Pressure Laminate
- Available in the Steelcase Universal Table style
- Edge finish is specified separately from laminate color
- Reinforced where necessary with steel bars
- Available in Rectangular, 90° and 120° Corner configurations
- Available in 23" and 29" depths in Rectangular; 23" only in 90° and 120°
- Maximum standard table size is 140 linear inches (based on a 90° 70" x 70" x 23" table)
- Worksurfaces have pre-drilled mounting holes for the base
- Worksurfaces have a 1" gap between rear and panel face for clearance and cable access
- Wire management is available
- All standard Steelcase laminates supported (see Details SpecGuide for a full list)
- Open line laminates are available
- Universal worksurfaces are SCS Indoor Advantage™ certified for indoor air quality

Base Construction:

- Lifting column and feet are extruded aluminum. Stretcher bar is steel.
- Rigid design maximizes floor space without sacrificing stability
- Low profile column construction
- Full clearance under the worksurface meets ANSI/BIFMA ergonomic guidelines
- Electronics are certified by TUV to UL-73 and CSA C22.2
- DC motors ensure smooth, quiet operation

Product Features continued

- Trough provided to manage excess base controller wires
- 9 ft. power cord
- Two-piece telescoping stretcher design
- Ships K.D. – minimal tools required for assembly
- Base only options are available in Rectangular, 90° and 120° Corner configurations
- Color: Black and Platinum

Terms & Conditions

Warranty:

- Worksurface – 10 years
- Lifting columns and drive package (including electronics) – 5 years

Lead-time:

- Standard – 4 to 6 weeks upon order acknowledgement
- Specials – Anything not included in the above, including open line laminates
- All leadtimes subject to change based on business conditions

Returns:

- Standard returns policy applies

Freight:

- Pre-paid

Product ships K.D.:

- Final assembly and installation costs should be considered separately

**For further information, please go to the Details website details-worktools.com
or call 800.833.0411**

P.O. Box 1967 / CD-5E Grand Rapids, MI 49501-1967
©2010 Steelcase Inc. All rights reserved. 01/10